





I. Rinne / Channel:



light NW100 mini 55



light NW100

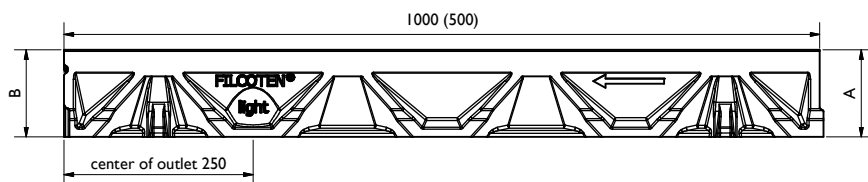

light NW100, Nr. 5-0 f. seitl. Bohrung/f. side outlet drilling

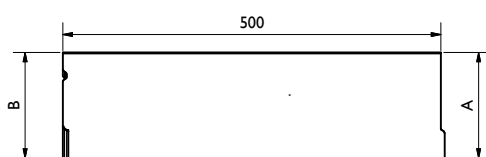


| Rinne / channel - Maße / dimensions [mm] | | | | |
|--|--------------------|--------------------|-----------------|----------|
| Typ | Höhe A height A | Höhe B height B | Länge length | BG code |
| mini 55 | 55 | 55 | 1000 | 10110000 |
| 0 | 115 | 115 | 1000 | 10311000 |
| 0 (0,5m) | 115 | 115 | 500 | 10311050 |
| 1 | 115 | 120 | 1000 | 10311001 |
| 2 | 120 | 125 | 1000 | 10311002 |
| 3 | 125 | 130 | 1000 | 10311003 |
| 4 | 130 | 135 | 1000 | 10311004 |
| 5 | 135 | 140 | 1000 | 10311005 |
| 5-0 | 140 | 140 | 1000 | 10311061 |
| 5-0 (0,5m) | 140 | 140 | 500 | 10311051 |
| 6 | 140 | 145 | 1000 | 10311006 |
| 7 | 145 | 150 | 1000 | 10311007 |
| 8 | 150 | 155 | 1000 | 10311008 |
| 9 | 155 | 160 | 1000 | 10311009 |
| 10 | 160 | 165 | 1000 | 10311010 |
| 10-0 | 165 | 165 | 1000 | 10311062 |

| Legende / explanation: | |
|------------------------|-------------------------------------|
| V: | verzinkter Stahl / galvanized steel |
| E: | Edelstahl / stainless steel |
| G: | Gußeisen / ductil iron |
| H: | Holz / wood |


2. Stegrost / Slotted grating:

A15kN: SW8/80 V 17010200 (17010201), SW5/80 E 17010300 (17010301)

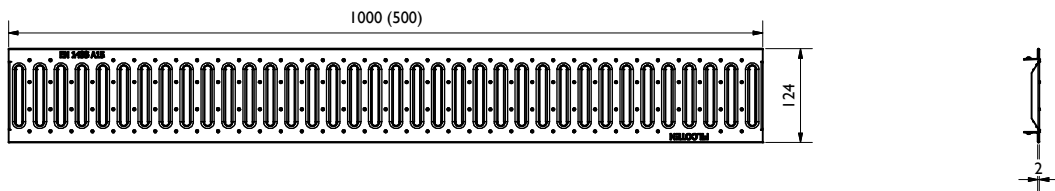


2. Gitterrost / Mesh grating:

BI25kN MW30/10: V 17010210 (17010211), E 17010310 (17010311)

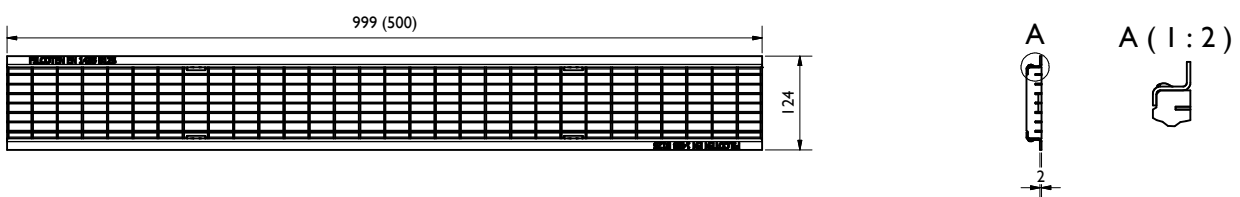

2. Gußrost / Ductil iron grating:

C250kN MW15/25: GJS 17010100,
KTL-beschichtet / KTL-coated 17010150


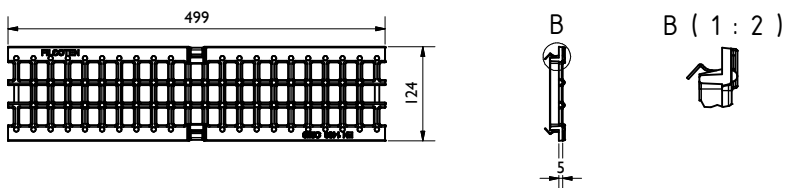


data sheet:



FILCOTEN light NW100

2. Schlitzaufsatz / Slot top:

C250kN SW12,5: V 17110243 (17110244), E 17110343 (17110344)


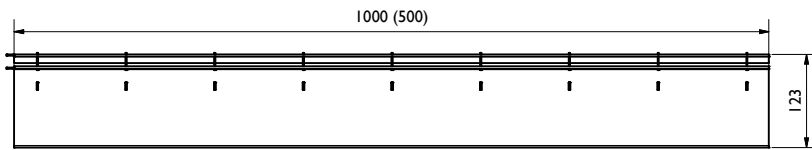


C250kN SW18: V 17110233 (17110234), E 17110333 (17110334)


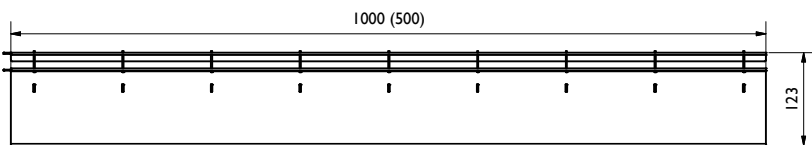


2. Revisionschacht / Maintenance unit:



C250kN SW12,5: V 17110281, E 17110381

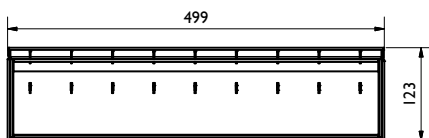

C250kN SW18: V 17110295, E 17110395


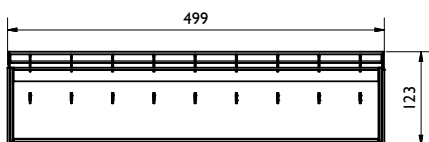


2. Slotzeinlage / Slot inlay square-perf. 8/8:
V 37951 (37950), E 37956 (37955)

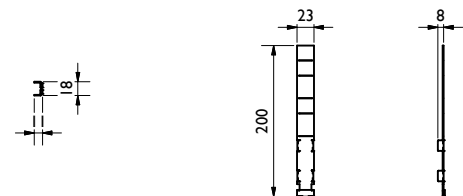



4. Stirnplatte/End cap:
V 17110280, E 17110380

2. Bauzeitabdeckung / Construction time barrier SW 18:
H 37961





2. Schlitzaufsatz / Slot top:

BI25kN SW12,5: V 17110237 (17110238), E 17110337 (17110338)

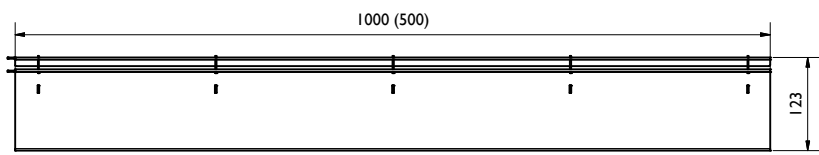

2. Revisionschacht / Maintenance unit:


BI25kN SW12,5: V 17110297, E 17110397

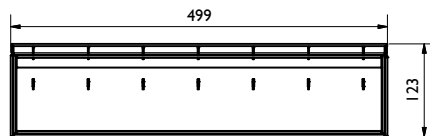

3. Sinkkasten / Sump unit:


(optional: Geruchsverschluss / Drain trap: 30056
Schlammeimer / Silt bucket: 22515)

V 10310093

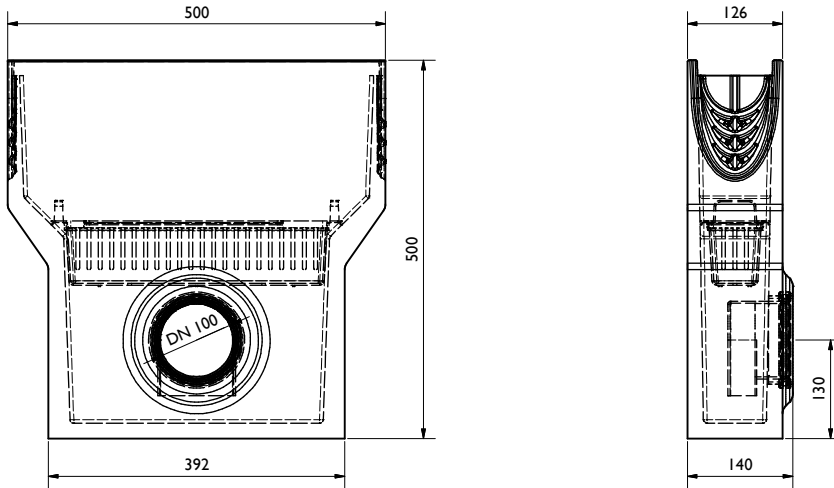


4. Stirn-/ Endplatte
/ End cap:


V 19010230, E 19010330




V 19010232, E 19010332



mini: V 19010200, E 19010300



5. Geruchsverschluss für Bodenablauf
/ Drain trap for bottom outlet:
PVC 30019




6. Halteklammer / Fixing clip:

Gussmaschenrost/ ductil iron mesh grating
32068



6. Patentklammer / Locking clip:

Gitterrost/ Mesh grating
32080



Gussmaschenrost/ ductil iron mesh grating
32067

